

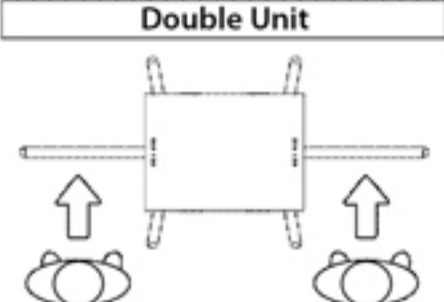
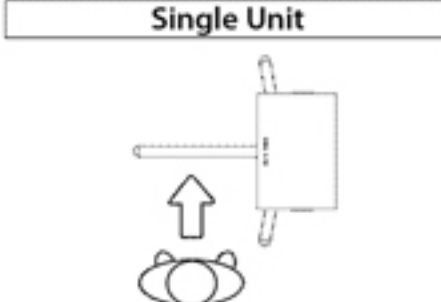





GENERAL SPECIFICATIONS

10702-R

	Material	Body	304 grade stainless steel (opt. 316 grade).	
		Arm	304 grade stainless steel (opt. 316 grade).	
	Available for	 INDOOR OUTDOOR ☒		 INDOOR ☐
	Energy	110/220-240V 50-60Hz. AC (±%10) - 24V DC		
	Control System	Dry contact (ground control)		
	Nr. of Passage Lanes	Double Unit 		Single Unit  ☒
				
	Rotor System	120° (3 Arms) Rotor System 		90° (Wing) Rotor System  ☐
				
	Operation	 BI-DIRECTIONAL ☒		 UNI-DIRECTIONAL ☐
	Indicators		S STANDARD ☒	O OPTIONAL ☐
			S STANDARD ☒	O OPTIONAL ☐
	Emergency	Automatic drop arm retracts and allows free passage		
	Reduced Mobility (ADA) Compatibility	  AVAILABLE ☐		  NOT AVAILABLE ☒

For further details, please download "Technical Specifications" file.