
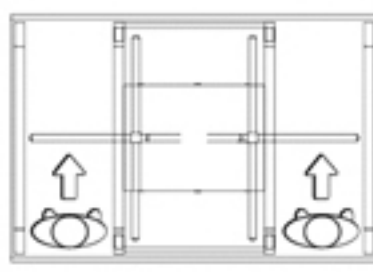






GENERAL SPECIFICATIONS

HT 10400-D

	Material	Body	304 grade stainless steel (opt. 316 grade).	
		Arm	304 grade stainless steel (opt. 316 grade).	
	Available for	 INDOOR OUTDOOR ☒		 INDOOR ☐
	Energy	110/220-240V 50-60Hz. AC (±%10) - 24V DC		
	Control System	Dry contact (ground control)		
	Nr. of Passage Lanes	Double Unit  ☒		Single Unit  ☐
	Rotor System	90° (4 Arms) Rotor System  ☒		120° (3 Arms) Rotor System  ☐
	Operation	 BI-DIRECTIONAL ☒		 UNI-DIRECTIONAL ☐
	Indicators		 STANDARD ☒	 OPTIONAL ☐
			 STANDARD ☐	 OPTIONAL ☐
	Emergency	Arms allow free passage		
	Reduced Mobility (ADA) Compatibility	 	AVAILABLE ☐	  NOT AVAILABLE ☒

For further details, please download "Technical Specifications" file.