
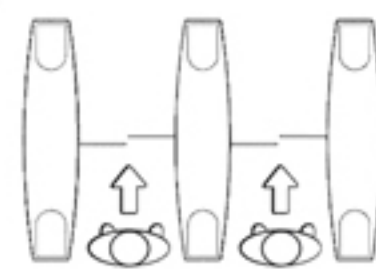






GENERAL SPECIFICATIONS

SG 1055

	Material		
	Body	Natural granite top lid on 304 grade stainless steel (opt. 316 grade) body.	
	Wing	Tempered glass.	
	Available for	 INDOOR OUTDOOR ☐	 INDOOR ☒
	Energy	110/220-240V 50-60Hz. AC (±%10) - 24V DC	
	Control System	Dry contact (ground control)	
	Nr. of Passage Lanes	Double Unit  ☒	Single Unit  ☒
		Wings Retracting Into Body  ☒	90° (Wing) Rotor System  ☐
	Wing Movement		
	Operation	 BI-DIRECTIONAL ☒	 UNI-DIRECTIONAL ☐
	Indicators	 ☒	 ☐
		 ☒	 ☐
	Emergency	Wings allow free passage	
	Reduced Mobility (ADA) Compatibility	 AVAILABLE ☐	 NOT AVAILABLE ☒

For further details, please download "Technical Specifications" file.